

Diaphragm Valve, Metal

Construction

The GEMÜ 625 2/2-way diaphragm valve has a low maintenance piston actuator which can be controlled by inert gases. Normally Closed, Normally Open and Double Acting control functions are available. An optical position indicator is integrated as standard.

Features

- Suitable for inert and corrosive* liquid and gaseous media
- Insensitive to particulate media
- Valve body and diaphragm available in various materials and designs
- Compact design (ideal when space is at a premium)
- CIP/SIP cleaning and sterilizing capabilities
- Versions according to ATEX on request


Advantages

- Hermetic separation between medium and actuator
- For sterile applications
- Optional flow direction, will seal in either flow direction up to full operating pressure
- Optional mounting position
- Optional accessories:
 - Stroke limiter
 - Electrical position indicators with microswitches or proximity switches

*see information on working medium on page 2



Sectional drawing

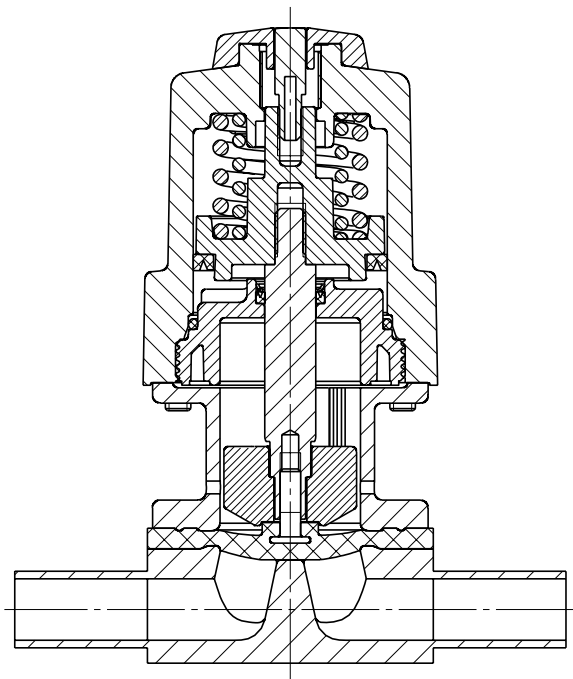

Technical data

Working medium

Corrosive, inert, gaseous and liquid media which have no negative impact on the physical and chemical properties of the body and diaphragm material.

Operating temperature (dependent on medium wetted materials) max. 150 °C

Control medium

Inert gases


Max. perm. temperature of control medium 40 °C

Filling volume 0.02 dm³

Ambient conditions

Max. ambient temperature 60 °C

Control function 2 + 3

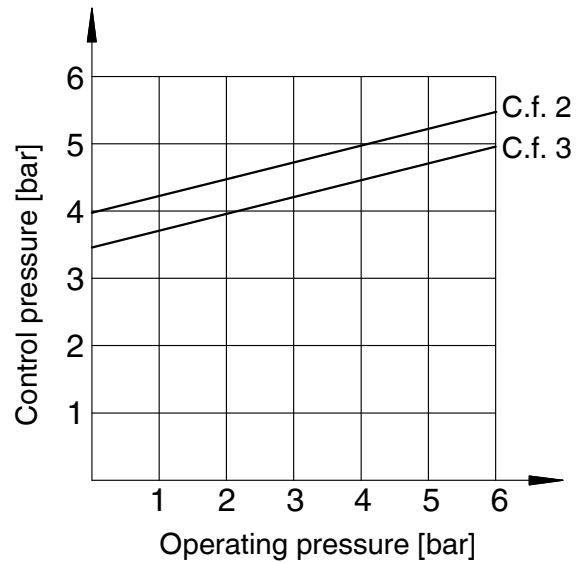

Diaphragm size	Nominal size DN	Operating pressure [bar]	Control pressure [bar]		
			C.f. 1	C.f. 2	C.f. 3
10	10	0 - 6	5 - 7	max. 5.5	max. 5.0
	12				
	15				
	20				

All pressures are gauge pressures. Operating pressure values were determined with static operating pressure applied on one side of a closed valve. Sealing at the valve seat and atmospheric sealing is ensured for the given values. Information on operating pressures applied on both sides and for high purity media on request.

Kv values [m³/h]

Diaphragm size	DN	DIN Code 0	DIN 11850 Series 1 Code 16	DIN 11850 Series 2 Code 17	DIN 11850 Series 3 Code 18	ASME BPE Code 59	EN ISO 1127 Code 60
10	10	-	2.4	2.4	2.4	2.2	3.3
	15	3.3	3.8	3.8	3.8	2.2	4.0
	20	-	-	-	-	3.8	-

Kv values determined acc. to IEC 534 standard, inlet pressure 6 bar, Δp 1 bar, stainless steel valve body and soft elastomer diaphragm.

Diaphragm temperature range [°C]

Diaphragm	Liquid Media		Steam (Sterilisation)	Code
	Min.	Max.		
EPDM	-10	90	150 °C, max. 60 min	13
EPDM	-10	90	150 °C, max. 60 min	16
EPDM	-10	90	150 °C, max. 180 min	17
PTFE	-10	90	Constant temperature* 150 °C	52
FPM	-10	90	not applicable	4

* The valves concerned must be serviced regularly if steam is applied continuously

Order data

Body configuration	Code
Tank valve body	B**
2/2-way body	D
Multi-port design	M**
T body	T*
* For dimensions see T Valves brochure	
** Dimensions and versions on request or according to customer requirements	

Connection	Code
Butt weld spigots	
Spigots DIN	0
Spigots DIN 11850, series 1	16
Spigots DIN 11850, series 2	17
Spigots DIN 11850, series 3	18
Spigots DIN 11866, series A	1A
Spigots DIN 11866, series B	1B
Spigots JIS-G 3459	36
Spigots BS 4825, part 1	55
Spigots ASME BPE	59
Spigots EN ISO 1127	60
Spigots ANSI/ASME B36.19M, Schedule 10s	63
Spigots ANSI/ASME B36.19M, Schedule 40s	65
Threaded connections	
Threaded sockets DIN ISO 228	1
Threaded spigots DIN 11851	6
One side threaded spigot, other side cone spigot and union nut, DIN 11851	62
Aseptic unions on request	
Clamp connections	
Clamps ASME BPE for pipe ASME BPE, length ASME BPE	80
Clamps DIN 32676 series B for pipe EN ISO 1127, length EN 558, series 7	82
Clamp ASME BPE for pipe ASME BPE, length EN 558, series 7	88
Clamps DIN 32676 series A for pipe DIN 11850, length EN 558, series 7	8A
For overview of available valve bodies for GEMÜ 625 see page 8	

Valve body material	Code
1.4435 - BN2 (CF3M), investment casting Fe<0.5%	32
1.4435 (ASTM A 351 CF3M, Δ 316L), investment casting	34
1.4435 (316 L), forged body	40
1.4435 (BN2), forged body Fe<0.5%	42

Diaphragm material	Code
FPM	4
EPDM	13
EPDM	16
EPDM	17
PTFE/EPDM PTFE laminated	52
Material complies with FDA requirements, except codes 4	

Control function	Code
Normally closed (NC)	1
Normally open (NO)	2
Double acting (DA)	3

Actuator size	Code
Standard version	1/N

For further order data see page 4

Order data

Valve body surface finish, internal contour

		Forged body Code 40, 42	Investment casting Code 32, 34	Code
Ra ≤ 6.3 µm	blasted internal/external	-	X	1500
--	electropolished	-	X	1509
Ra ≤ 0.8 µm	mechanically polished internal, blasted external	X	X	1502
Ra ≤ 0.8 µm	electropolished internal/external	X	-	1503
Ra ≤ 0.6 µm	mechanically polished internal, blasted external	X	X	1507
Ra ≤ 0.6 µm	electropolished internal/external	X	-	1508
Ra ≤ 0.4 µm	mechanically polished internal, blasted external	X	-	1536
Ra ≤ 0.4 µm	electropolished internal/external	X	-	1537
Ra ≤ 0.25 µm	mechanically polished internal, blasted external	X	-	1527
Ra ≤ 0.25 µm	electropolished internal/external	X	-	1516


Ra acc. to DIN 4768; at defined reference points
Surface finish data refer to medium wetted surfaces

Order example	625	15	D	60	34	13	1	1/N	1500
Type	625								
Nominal size		15							
Body configuration (code)			D						
Connection (code)				60					
Valve body material (code)					34				
Diaphragm material (code)						13			
Control function (code)							1		
Actuator size (code)								1/N	
Surface finish									1500

Dimensions [mm]

Actuator dimensions

Diaphragm size	A	A1	A2	B	B1	B2	G	Weight [kg]
10	110	49	30	57	35	68	G 1/4	0.45

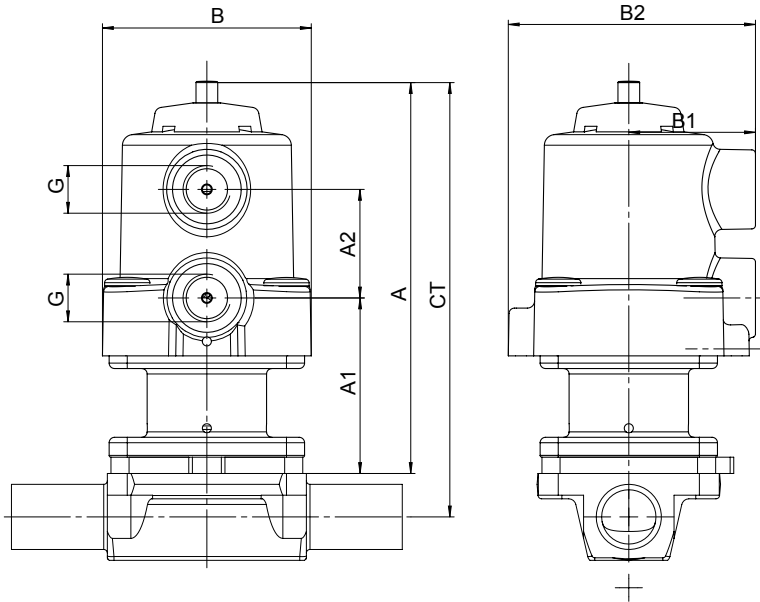


* CT = A + H1 (see body dimensions)

Body dimensions [mm]

Threaded sockets, connection code 1 Valve body material: investment casting (code 34)

MG	DN	R	H	H1	t	L	SW2	Number of flats	Weight [kg]
10	12	G 3/8	23	10.5	13	55	22	2	0.17
	15	G 1/2	29	13.5	15	68	24	2	0.26

MG = diaphragm size

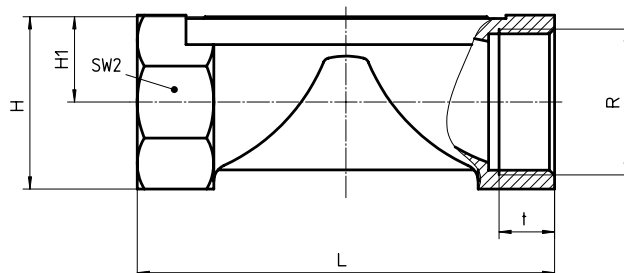

Body dimensions [mm]

Butt weld spigots, connection code 0, 16, 17, 18 Valve body material: investment casting (code 34), forged body (code 40)

								DIN Series 0 Code 0		DIN 11850 Series 1 Code 16		DIN 11850 Series 2 Code 17		DIN 11850 Series 3 Code 18		Weight [kg]
MG	DN	NPS	f*	øg*	L	c	H1	ød	s	ød	s	ød	s	ød	s	
10	10	3/8"	30	13.5	108	25	12.5	-	-	12	1.0	13	1.5	14	2.0	0.30
	15	1/2"	30	13.5	108	25	12.5	18	1.5	18	1.0	19	1.5	20	2.0	0.30

* only for investment cast design MG = diaphragm size For materials see overview on last page

Butt weld spigots, connection code 1A, 1B, 60 Valve body material: investment casting (code 34), forged body (code 40)


								DIN 11866 Series A Code 1A		DIN 11866 Series B Code 1B		EN ISO 1127 Code 60		Weight [kg]
MG	DN	NPS	f*	øg*	L	c	H1	ød	s	ød	s	ød	s	
10	10	3/8"	30	13.5	108	25	12.5	13	1.5	17.2	1.6	17.2	1.6	0.30
	15	1/2"	30	13.5	108	25	12.5	19	1.5	21.3	1.6	21.3	1.6	0.30

* only for investment cast design MG = diaphragm size For materials see overview on last page

Butt weld spigots, connection code 36, 55, 59, 63, 65 Valve body material: investment casting (code 34), forged body (code 40)

								JIS-G 3459 Code 36		BS 4825 Code 55		ASME BPE Code 59		ANSI/ASME B36.19M 10s Code 63		ANSI/ASME B36.19M 40s Code 65		Weight [kg]
MG	DN	NPS	f*	øg*	L	c	H1	ød	s	ød	s	ød	s	ød	s	ød	s	
10	10	3/8"	30	13.5	108	25	12.5	17.3	1.65	9.53	1.2	9.53	0.89	17.1	1.65	17.1	2.31	0.30
	15	1/2"	30	13.5	108	25	12.5	21.7	2.10	12.70	1.2	12.70	1.65	21.3	2.11	21.3	2.77	0.30
	20	3/4"	30	13.5	108	25	12.5	-	-	19.05	1.2	19.05	1.65	-	-	-	-	0.30

* only for investment cast design MG = diaphragm size For materials see overview on last page

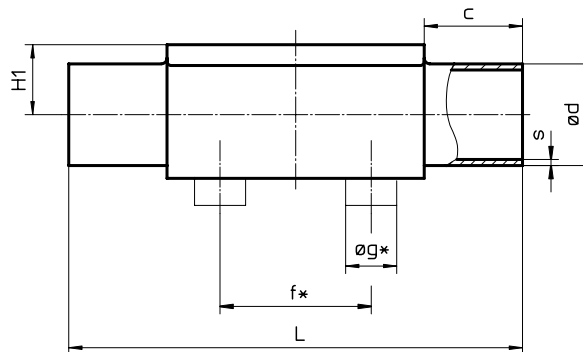

Body dimensions [mm]

Threaded connections, connection code 6, 62 Valve body material: investment casting (code 34), forged body (code 40)


MG	DN	H1	f*	øg*	ød1	Thread to DIN 405 R	Code 6 L	Code 62 L	Weight [kg]
10	10	12.5	30.0	13.5	10.0	RD 28 x 1/8	118	116	0.33
	15	12.5	30.0	13.5	16.0	RD 34 x 1/8	118	116	0.35

* only for investment cast design


MG = diaphragm size

For materials see overview on last page

Code 6

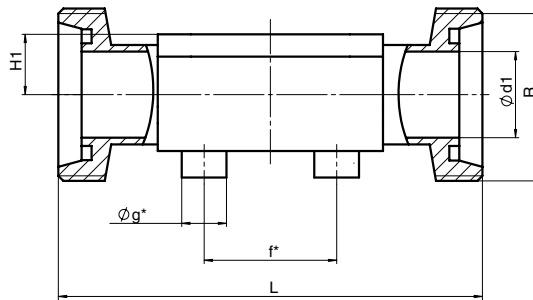


Code 62

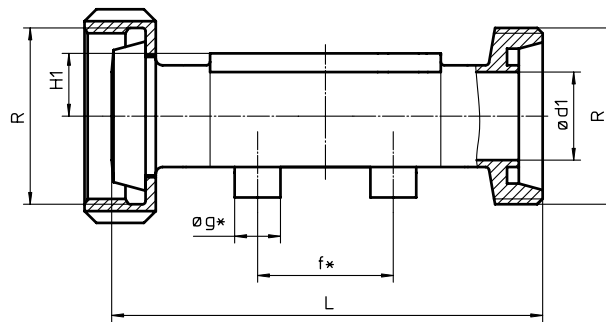

Clamp connections, connection code 80, 82, 88, 8A Valve body material: forged body (code 40)

MG	DN	NPS	H1	for pipe ASME BPE Code 80			for pipe EN ISO 1127 Code 82			for pipe ASME BPE Code 88			for pipe DIN 11850 Code 8A			Weight [kg]
				ød1	ød3	L	ød1	ød3	L	ød1	ød3	L	ød1	ød3	L	
10	10	3/8"	12.5	-	-	-	14.0	25.0	108	-	-	-	10	34.0	108	0.30
	15	1/2"	12.5	9.40	25.0	88.9	18.1	50.5	108	9.40	25.0	108	16	34.0	108	0.43
	20	3/4"	12.5	15.75	25.0	101.6	-	-	-	15.75	25.0	117	-	-	-	0.43

MG = diaphragm size

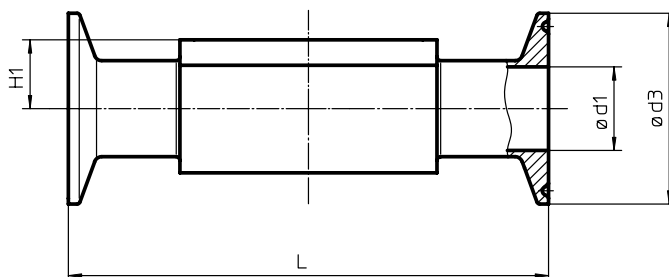

Overview of valve bodies for GEMÜ 625

		Threaded connections				Spigots																Clamps							
Connection code		1	6		62		0		16		17		18		1A	1B	36	55		59		60		63	65	80	82	88	8A
Material code		34	34	40	34	40	34	40	34	40	34	40	34	40	40	40	40	34	40	34	40	34	40	40	40	40	40	40	40
MG	DN																												
10	10	-	W	W	W	W	-	-	X	X	X	X	X	X	X	X	-	X	-	X	X	X	X	X	X	-	K	-	K
	12	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	15	X	W	W	W	W	X	X	X	X	X	X	X	X	X	X	X	X	-	X	X	X	X	X	X	K	W	K	K
	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	-	-	-	-	-	K	-	K	-

X = Standard

K = Connections completely machined (not welded) in material code 40

W = Welded construction

MG = diaphragm size

Availability of material code 32: same as code 34

Accessories



GEMÜ 1230 - 1232
Electrical position indicators
with microswitches or
inductive proximity switches



GEMÜ 1234
Electrical position indicator
with LED indication;
automated commissioning



GEMÜ 1235/1236
Electrical position indicators
with LED indication;
intelligent programming



GEMÜ 1434 µPos
Electro-pneumatic positioner



GEMÜ 1435 ePos
Electro-pneumatic positioner,
single or double acting

For further metal diaphragm valves, accessories and other products,
please see our Product Range catalogue and Price List.
Contact GEMÜ.

GEMÜ® VALVES, MEASUREMENT
AND CONTROL SYSTEMS

