

**Product Information**

**Flow limiter WT**




- Installation location as desired
- No need for auxiliary power


**Characteristics**

Mechanical flow limiter for fluid media. If the volume flow is tending to increase, an elastomer is compressed. This achieves an almost constant flow value.

Flow value%  
of controlled value



**Dimensions**

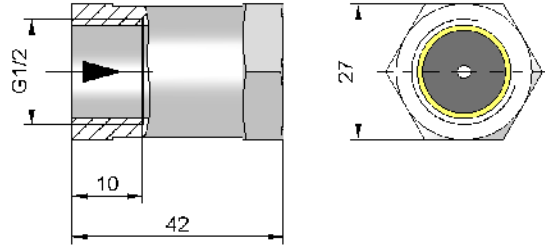

**Ordering code**

WT -

<b>1. Nominal width</b>	015	DN 15 - G 1/2
<b>2. Process connection</b>	G	female thread
<b>3. Connection material</b>	M	brass
<b>4. Controlled value H<sub>2</sub>O</b>	050	5.0 l/min H <sub>2</sub> O
	075	7.5 l/min H <sub>2</sub> O
	135	13.5 l/min H <sub>2</sub> O

**Ordering information**

- Specify direction of flow, medium, and controlled value.

**Technical data**

<b>Nominal width</b>	DN 15
<b>Process connection</b>	female thread G 1/2
<b>Controlled values</b>	5.0 l/min 7.5 l/min 13.5 l/min
<b>Differential pressure</b>	1.5..8 bar
<b>Tolerance</b>	±15 %
<b>Pressure resistance</b>	PN 100 bar
<b>Media temperature</b>	0..100 °C
<b>Ambient temperature</b>	0..70 °C
<b>Medium</b>	water
<b>Materials medium-contact</b>	CW614N nickelled NBR
<b>Weight</b>	0.2 kg
<b>Installation location</b>	as desired