


Sanitary filter housing LT-KFHB

Features

- Suitable for filter cartridges with Code 7 (226 / Fin) and Code 8 (222 / Fin)
- Design sizes for 1, 3, 5, 8, 12, 18, 24 and 30 cartridges in lengths of 10", 20", 30" and 40"
- Variable connection types or dimensions (En1092-1 flange, ASME 150lb flange, DIN11851 milk tube)
- Material: 316L / 1.4404
- Surface treatment: inside and outside mechanically polished
- Surface roughness inside: RA <0.8µm
- Operating pressure: max. 10 bar (depending on size, medium and state of aggregation)
- Sealing material: silicone (standard, others on request)
- Venting connection: 1.5" Tri-clamp
- Drain connections: 1.5" Tri-Clamp
- Lock with clamp (small series) or eyebolts (large series)

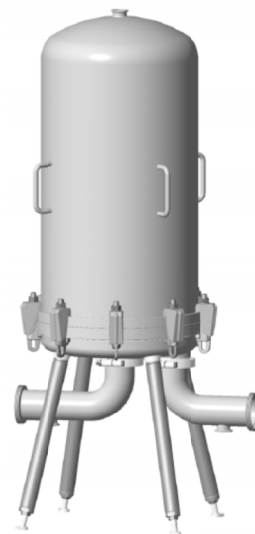

Filter housing LT-KFHB

Ordering information LT-KFHB-

513 - 05 - 20 - 7 - S - D040					
Type	Number of cartridges	Cartridge length	Cartridge adaptor type	Sealing	Connection style and dimension
513	01: 1 03: 3 05: 5 08: 8 12: 12 18: 18 24: 24 30: 30	10: 10" 20: 20" 30: 30" 40: 40"	7: 226/Spear (SOE) 8: 222/Spear (SOE)	S: Silicone E: EPDM V: Viton P: FEP+ Silicone	Din11851 milk pipe: D025: DN25 D040: DN40 D050: DN50 D065: DN65 D080: DN80 D100: DN100 Flange EN1092-1 E020: DN20 E025: DN25 E030: DN32 E040: DN40 E050: DN50 E065: DN65 E080: DN80 E100: DN100 E125: EN125 Flange ASME 150 lb: A075 A100: 1" A125: 1,25" A150: 1,5" A200: 2" A300: 3" A400: 4" A500: 5" A600 6"