



GU100

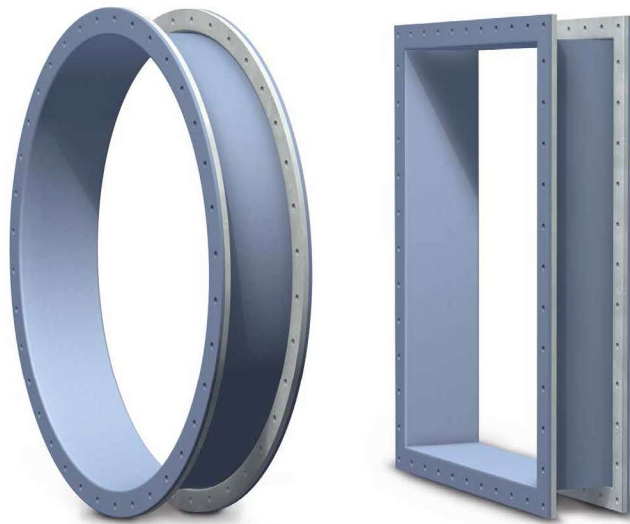

Type GU100



Flange expansion joint without arch

- Design:** Straight or conical elastomer or multilayer expansion joint with self-sealing flanges and single or multi-part backing flanges
- Installation method:** Fixes to flange at duct level
- Dimensions:** For round, rectangular and oval duct cross sections
- Installation length:** According to customer specification
- Media temperature:** Suitable for up to 400 °C
- Pressure:** Up to ±0.25 bar
Higher pressures on request
- Movement:** For axial, lateral and angular movements
Benchmarks:
axial compression = approx. 0.20 x installation length
axial extension = approx. 0.20 x installation length
lateral displacement = approx. 0.15 x installation length
In the event of axial extension and simultaneous lateral displacement, movements are reduced
For large lateral movements, we recommend presetting the duct against the direction of movement

Application:
Power plants, waste incineration plants, gas turbines, cement factories, paper industry, steel industry e.g. in the exhaust pipes, in ventilators, in air ducts, in the flue gas scrubber, in filter systems



Expansion joint variants

	Elastomer expansion joint	Multilayer expansion joint
Temperature:	up to 200 °C	up to 400 °C
Design:	Single-layer elastomer expansion joint fully joined with one or more fabric reinforcement inserts	Multilayer fabric expansion joint consisting of interior insulating layers, embedded sealing films and exterior pressure carrier fabrics
Material:	<p>Rubber grades: up to 100 °C: EPDM, IIR, CSM, NBR up to 180 °C: FPM up to 200 °C: Silicon (Q)</p> <p>PTFE lining: Permanently embedded on the inside at the rubber bellows in order to withstand corrosive chemical attack, available starting at NB 300</p> <p>Inserts: Nylon, polyester, Kevlar, glass fibre, and steel mesh</p>	<p>Internal layers: PTFE glass fibre fabric laminate, glass fibre fabric, glass mat, silicate fabric</p> <p>Sealing films: PTFE film, stainless steel film</p> <p>External layer: Silicon coated glass fibre fabric PTFE-glass fibre fabric laminate</p>

Flanges

- Design:** Single-part or multi-part backing flanges with clearance holes
- Flange norms:** According to customer specification
- Materials:** Carbon steel: 1.0038 (S235JRG2)
Stainless steel: 1.4301 (X5CrNi18-10)
1.4571 (X6CrNiMoTi17-12-2)
Other materials on request
- Coating:** Primed, hot-dip galvanised, special paint

Flow liners

- Design:** Cylindrical, conical or telescoping flow liner (▶ page 24)
- Materials:** Carbon steel: 1.0038 (S235JRG2) Stainless steel: 1.4301 (X5CrNi18-10)
1.0570 (S355J2G3) 1.4571 (X6CrNiMoTi17-12-2)
1.0425 (P265GH) 1.4828 (X15CrNiSi20-12)
1.5415 (16Mo3) Other materials on request
1.4713 (X10CrAl7)
- Coating:** Primed, hot-dip galvanised, special paint

Optional accessories

- Fixing:** Screws
Nuts
Washers
Disc springs

Planning help GU100

