



U900A



► Type U900A



Planning help U900A

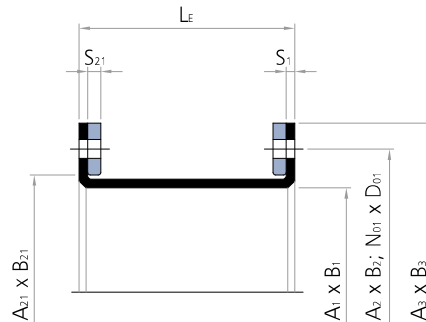

Rectangular universal expansion joint without arch






















- Design:** Rectangular rubber bellows with full faced rubber flanges and single- or multi-part backing flanges
Oval construction type or rounded corners also possible
- Dimensions:** Individual length x width
- Installation length:** According to customer specification
- Pressure:** Depending on the dimensions and installation length up to 2.5 bar
Vacuum stability on request
- Movement:** For small axial and lateral movements

Application:
Power plants, plant construction, food processing, wastewater treatment plants, industrial plants, paper industry
e.g. to disconnect apparatus, for compressors



Assembly instruction download
www.ditec-adam.de/en/downloads.html

Rubber bellows

Rubber	Fabric	Marking	Max.	Application
EPDM	Nylon		100 °C	Cooling water, hot water, seawater, acids, dilute chlorine compounds
EPDM	Kevlar		100 °C	Cooling water, hot water, seawater, acids, dilute chlorine compounds
EPDMht	Kevlar		120 °C	Cooling water, hot water, seawater, acids, dilute chlorine compounds
EPDMtw	Nylon		100 °C	Drinking water
EPDMtw	Kevlar		100 °C	Drinking water
EPDMaf	Nylon		100 °C	Abrasive materials, water-sand extraction
EPDMaf	Kevlar		100 °C	Abrasive materials, water-sand extraction
EPDMbeige	Nylon		100 °C	Foodstuffs
EPDMbeige	Kevlar		100 °C	Foodstuffs
IIR	Nylon		100 °C	Hot water, acids, bases, gases
IIR	Kevlar		100 °C	Hot water, acids, bases, gases
CSM	Nylon		100 °C	Strong acids, bases, chemicals
CSM	Kevlar		100 °C	Strong acids, bases, chemicals
NBR	Nylon		100 °C	Oils, petrol, solvents, compressed air
NBR	Kevlar		100 °C	Oils, petrol, solvents, compressed air
NBRbeige	Nylon		100 °C	Oil, fatty foods
NBRbeige	Kevlar		100 °C	Oil, fatty foods
CR	Nylon		90 °C	Cooling water, slightly oily water, seawater
CR	Kevlar		90 °C	Cooling water, slightly oily water, seawater
FPM	Kevlar		180 °C	Corrosive chemicals, petroleum distillates
FPMbeige	Kevlar		180 °C	Oil, fatty foods
NR	Nylon		70 °C	Abrasive materials
Silicon	Kevlar or glass		200 °C	Air, saltwater atmosphere, foodstuffs, medical technology

PTFE-lining: Permanently embedded against chemical attacks on the interior at the rubber bellows.

Flanges

Design: Single-part or multi-part backing flanges with clearance holes

Flange norms: According to customer specification

Materials:

- Carbon steel: 1.0038 (S235JRG2)
1.0570 (S355J2G3)
- Stainless steel: 1.4301 (X5CrNi18-10)
1.4571 (X6CrNiMoTi17-12-2)
- Aluminium: AlMg3
- Other materials on request

Coating: Primed, hot-dip galvanised, special paint

Optional accessories

Protective hood: UV protection cover
Ground protective cover
Fire protection cover
Splash protective cover (▶ page 44)

Flow liners: Cylindrical flow liner
Conical flow liner
Telescoping flow liner (▶ page 43)